



DRY-COOLERS

FR.35.01-AVS

AVS Series

This range of dry-coolers have 2 exchange batteries mounted on V-shape with the purpose of the smaller surface required.







The sectional design on the AVS allow us to offer up to 9m length equipments and big diameter fans manufactured on PPG, which is resistant to any kind of enviromental contamination. The fans are directly motor shaft coupled and the motors have an IP55 protection level



**AXIAL
FANS**



**Hot dip galvanized
construction**

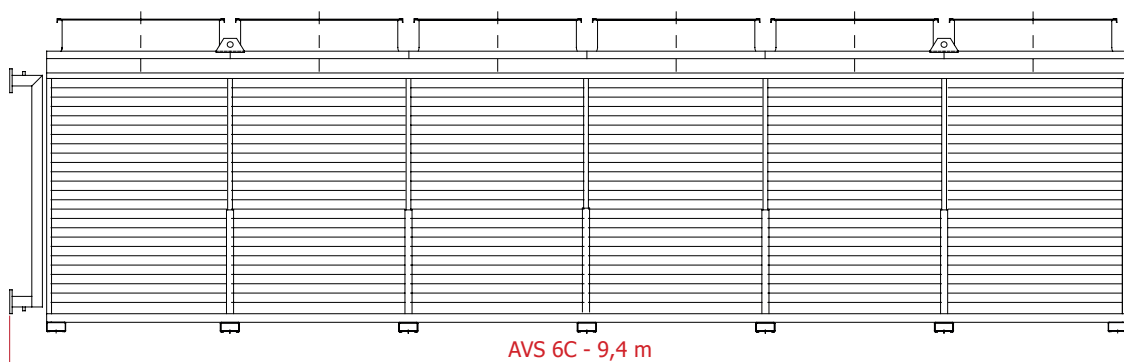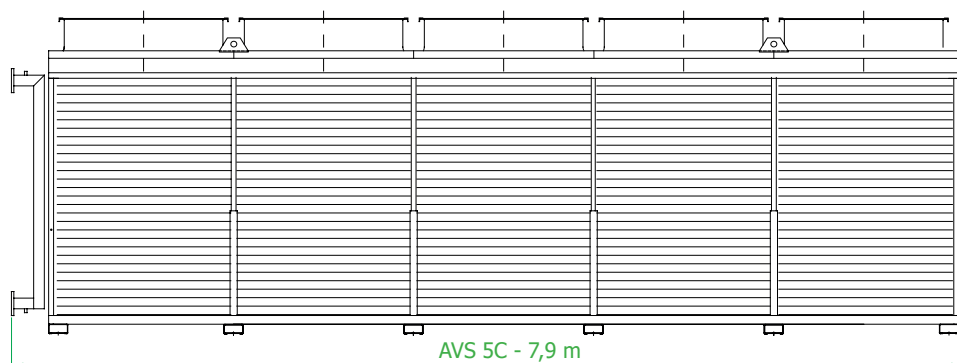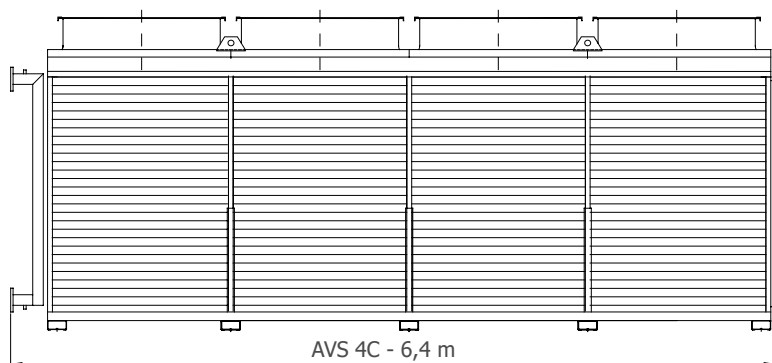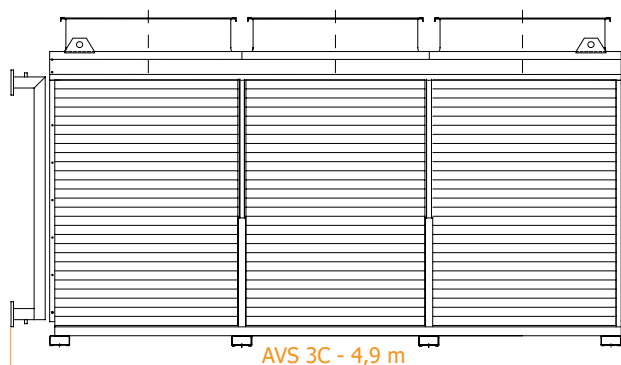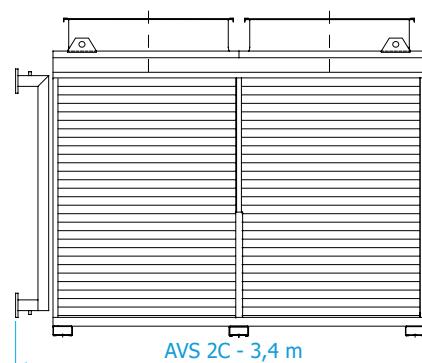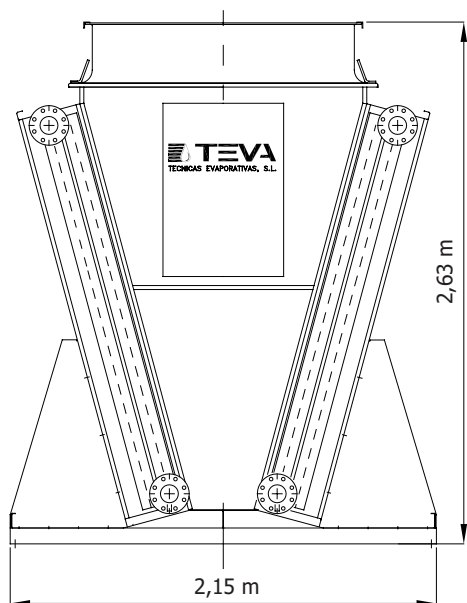

Model	Quantity x kW Motors
AVS 2C523	2 x 5,5
AVS 2C524	2 x 5,5
AVS 2C525	2 x 5,5
AVS 2C526	2 x 7,5
AVS 3C523	3 x 5,5
AVS 3C524	3 x 5,5
AVS 3C525	3 x 5,5
AVS 3C526	3 x 7,5
AVS 4C523	4 x 5,5
AVS 4C524	4 x 5,5
AVS 4C525	4 x 5,5
AVS 4C526	4 x 7,5
AVS 5C524	5 x 5,5
AVS 5C525	5 x 5,5
AVS 5C526	5 x 7,5
AVS 6C524	6 x 5,5
AVS 6C525	6 x 5,5
AVS 6C526	6 x 7,5