




TECNICAS EVAPORATIVAS, S.L.



Closed circuit cooling towers

FR.50.01

RMA Series

The closed circuit coolers from RMA series has 37 models, starting on 33 up to 2.540 kW. They are manufactured on galvanized or Stainless Steel. Their low consumption motors are shaft direct coupled to the axial fans, specially designed to provide a high cooling capacity with a low power rate.





The closed circuit cooling towers can cool down liquids like oil, water with glycol content, pure water and others without the need of external heat exchanger. The closed circuit cooler has the advantage vs the open circuit in combination with an external heat exchanger that we will only have one approach temperature, this will allow us to reach lower outlet temperatures, due that we save one approach temperature. Such a solution will offer you the best evaporative cooling features.



■ Axial fan, motor
direct shaft coupling

■ Galvanized Steel
Construction ■

Model	Quantity x kW Motors	Measurements (m)		
		L	W	H
RMA 020	2 x 0,37	1,33	0,73	2,63
RMA 025	2 x 0,55	1,33	0,73	2,88
RMA 030	2 x 0,55	1,54	0,73	2,88
RMA 035	2 x 0,75	1,83	0,85	2,74
RMA 040	2 x 1,1	2,04	0,85	2,74
RMA 045	2 x 1,1	1,83	0,85	3,01
RMA 055	2 x 1,1	2,45	0,85	3,01
RMA 060	2 x 1,1	2,28	1,02	3,04
RMA 070	2 x 1,5	2,51	1,02	3,04
RMA 080	2 x 1,5	2,28	1,02	3,31
RMA 090	2 x 1,5	2,51	1,02	3,31
RMA 100	3 x 1,1	3,13	1,19	3,24
RMA 101	3 x 1,1	3,13	1,02	3,51
RMA 130	3 x 1,5	3,58	1,19	3,24
RMA 140	3 x 1,5	3,13	1,19	3,51
RMA 160	3 x 1,5	3,58	1,19	3,51
RMA 165	3 x 2,2	3,58	1,19	3,51
RMA 190	3 x 2,2	4,87	1,36	3,32
RMA 210	3 x 3	5,32	1,36	3,32
RMA 240	3 x 3	4,87	1,36	3,61
RMA 260	3 x 3	5,32	1,36	3,61
RMA 300	3 x 3	5,97	1,48	3,52
RMA 320	3 x 4	5,17	1,48	3,81
RMA 370	3 x 4	5,97	1,48	3,81
RMA 375	3 x 5,5	5,97	1,48	4,10

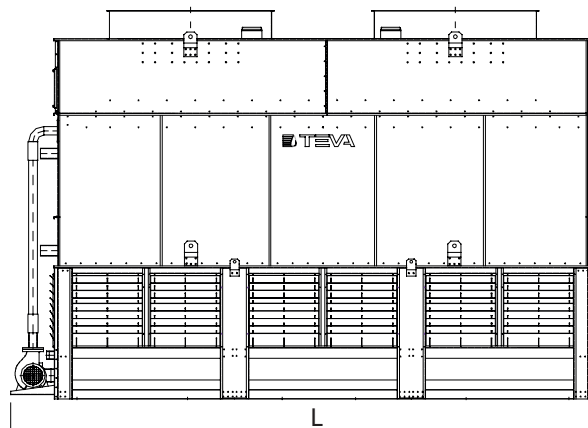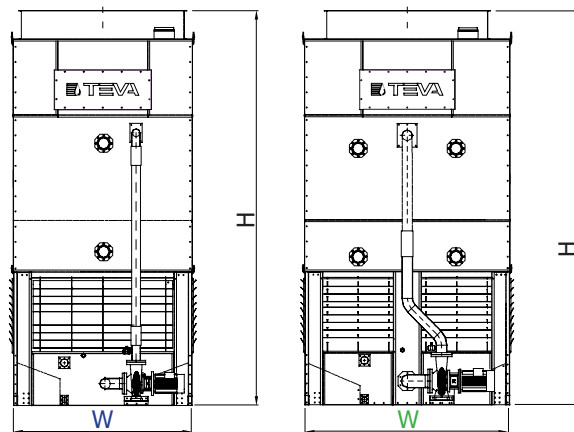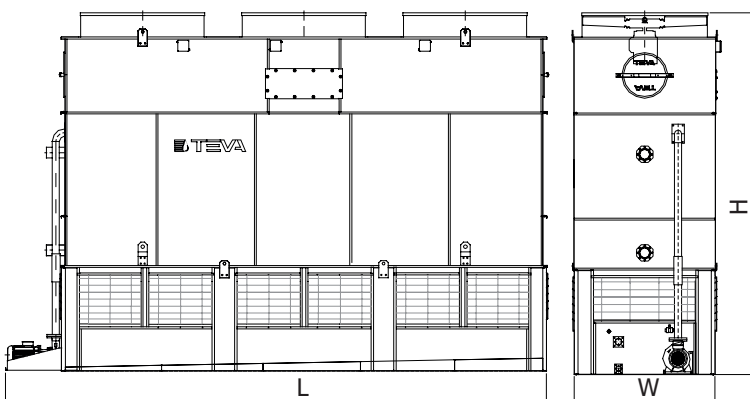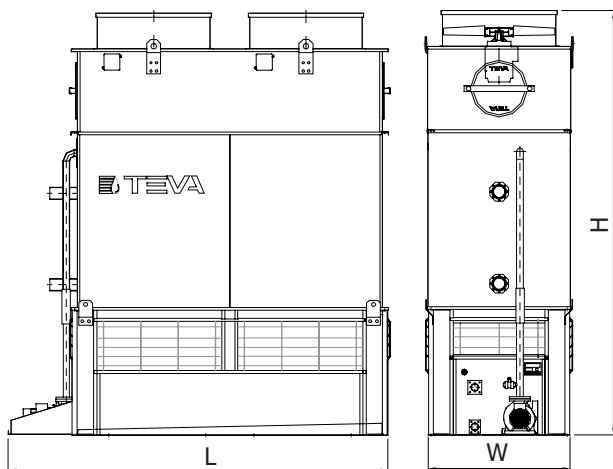

Model	Quantity x kW Motors	Measurements (m)		
		L	W	H
RMA 400	2 x 7,5	6,14	1,88	3,87
RMA 420	2 x 7,5	6,14	1,88	4,16
RMA 430	2 x 7,5	6,14	1,88	4,16
RMA 450	2 x 11	6,14	1,88	4,45
RMA 500	2 x 11	6,14	2,18	4,16
RMA 510	2 x 11	6,14	2,18	4,16
RMA 520	2 x 11	6,14	2,18	4,45
RMA 610	2 x 11	6,43	2,87	3,61
RMA 640	2 x 11	5,63	2,87	3,90
RMA 760	2 x 15	6,43	2,87	3,90
RMA 780	2 x 15	6,43	2,87	3,90
RMA 795	2 x 15	6,43	2,87	4,45
RMA 797	2 x 15	6,68	2,87	4,78
RMA 798	2 x 18,5	6,68	2,87	4,78

Model	Quantity x kW Motors	Measurements (m)		
		L	W	H
RMA 810	1 x 30	6,43	3,67	4,89
RMA 820	1 x 30	6,43	3,67	5,18
RMA 830	1 x 37	6,43	3,67	5,51
RMA 850	1 x 37	6,43	3,67	5,51

