



TEVA[®]
TECNICAS EVAPORATIVAS, S.L.

Open circuit cooling towers

FR.60.01

TVC Series

Usually, the cooling towers on GRP used to be for industrial applications, this is the reason the noise level was not a priority. The new TVC series have been developed with the aim to achieve the lowest noise level as possible and high adverse weather conditions.


This new TVC series has a total amount of 34 models, starting on a power rate of 123 kW up to 1.607 kW. All of them can be loaded completely assembled in a tautliner truck for road transport, no need of assembly at destination.



■ **Impeller Centrifugal fans
with acoustic isolation**

■ **GRP
construction** ■

Model	Quantity x kW Motors	Sound level at 15m ± 2 dB (A)	Measurements (m)		
			L	W	H
TVC 012	1 x 1,1	42	2,1	0,93	2,23
TVC 014	1 x 1,5	44	2,1	0,93	2,23
TVC 015	1 x 1,1	43	2,1	0,93	2,23
TVC 016	1 x 1,5	44	2,1	0,93	2,23
TVC 017	1 x 2,2	46	2,1	0,93	2,23
TVC 019	1 x 2,2	45	2,1	0,93	2,23
TVC 121	1 x 3	48	2,1	1,23	2,23
TVC 123	1 x 4	50	2,1	1,23	2,23
TVC 125	1 x 4	51	2,1	1,23	2,23
TVC 128	1 x 5,5	53	2,1	1,23	2,23
TVC 232	1 x 2,2	44	3,6	1,23	2,38
TVC 235	1 x 3	44	3,6	1,23	2,38
TVC 239	1 x 4	45	3,6	1,23	2,38
TVC 241	1 x 4	45	3,6	1,23	2,38
TVC 345	1 x 5,5	47	4,2	1,23	2,38
TVC 349	1 x 7,5	48	4,2	1,23	2,38
TVC 352	1 x 7,5	48	4,2	1,23	2,38
TVC 356	1 x 7,5	48	4,2	1,23	2,38

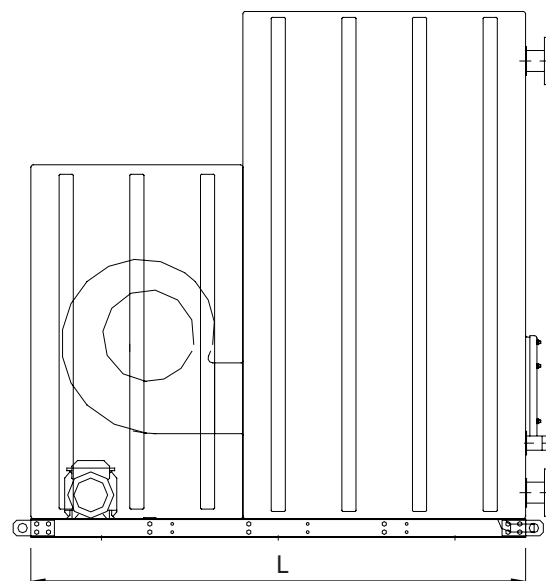

Model	Quantity x kW Motors	Sound level at 15m ± 2 dB (A)	Measurements (m)		
			L	W	H
TVC 462	1 x 9,2	50	4,8	1,23	2,38
TVC 467	1 x 11	51	4,8	1,23	2,38
TVC 471	1 x 11	51	4,8	1,23	2,38
TVC 575	1 x 15	54	5,4	1,23	2,38
TVC 580	1 x 15	54	5,4	1,23	2,38
TVC 585	1 x 15	54	5,4	1,23	2,38
TVC 601	1 x 9,2	50	4,2	2,40	2,38
TVC 607	1 x 11	50	4,2	2,40	2,38
TVC 610	1 x 15	51	4,2	2,40	2,38
TVC 611	1 x 15	51	4,2	2,40	2,38
TVC 712	1 x 18,5	53	4,8	2,40	2,38
TVC 713	1 x 22	54	4,8	2,40	2,38
TVC 714	1 x 22	54	4,8	2,40	2,38
TVC 815	1 x 30	56	5,4	2,40	2,38
TVC 816	1 x 30	56	5,4	2,40	2,38
TVC 817	1 x 30	56	5,4	2,40	2,38

